



# GLOSS

Dulux Gloss is a premium enamel paint recommended for decoration and protection of surfaces where a durable, glossy finish is required. It is ideal for painting household items and furniture made of steel, wood and aluminium.

## Product Features & Benefits

Dulux Gloss is a premium enamel paint in glossy finish. It provides durability, protection and strong colours. It comes in more than 4000 colors.



Multi-Surface



Washable




Long Lasting White

- 300 new colours through new 94 base.
- Superior performance and first-coat opacity in whites.



## Product related information



### FILM COMPOSITION

- PIGMENT: Light fast Non-Lead Pigment
- BINDER: Modified Alkyd
- SOLVENT: Mainly white Spirit with other non-toxic solvents
- COLOUR: See appropriate Shade Card/Fan deck

### VOC LEVEL



VOC (Theoretical)  
**ASTM D-3960**  
Varies from 400-450 gm/ltr. depending on the shades

Flash Point (IS 101/1987, Part 1, Sec 6) : 36 °C

### STABILITY OF THINNED PAINT:



Use within 24 hours of thinning after mixing

### COVERAGE

Under normal conditions it is 95-100 sq.ft/ltr for 2 coats. However this can show wide variation depending on actual type/ condition of cement.



1 COAT



2 COATS

95 - 100 sq.ft/ltr\*\*

Volume Solids : 50-60% (nominal)

### GLOSS/SHEEN LEVEL




### FILM THICKNESS


Dry Film Thickness  
**25-30 microns**

Wet Film Thickness  
**40-50 microns**

Wood / Metal



### PACK SIZE

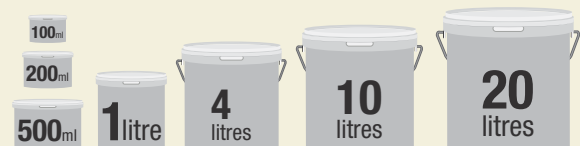

## APPLICATION RELATED INFORMATION

Before application, read the safety, health and environmental information and the precautions given below.

### SURFACE PREPARATION

- Ensure surface is dry & free from grime, dust and grease.
- Remove loose or flaking particles.
- Sand the surface by using Emery paper No. 320 & wipe clean.
- For pre-painted surface, where putty application is not expected use Emery paper No. 320 & wipe clean.

### THINNING



**Brush or Roller:** For best result, add up to 1 parts Duwel Thinner (61-33) or White Spirit/ Mineral Turpentine Oil (MTO) to 10 parts of paint by volume.



**Conventional Spray:** Add upto 2.5 parts Duwel Thinner (61-33) or White Spirit/ MTO to 10 parts of paint (25%) by volume depending on specification of the gun.

### SYSTEM INFORMATION

Metal Surface	<b>Primer - 1 coat</b> Duwel Red Oxide Metal Primer (34-0100) <b>Finish - 2 coats</b> Dulux Gloss Finish (28- Line)
Wood Surface	<b>Primer - 1 coat</b> Duwel Wood Primer White (34-0300) Duwel Wood Primer Pink (32-0129) <b>Finish - 2 coats</b> Dulux Gloss Finish (28- Line)
Masonry Surface	<b>Primer - 1 coat</b> Duwel Cement Primer (34-1200) <b>Finish - 2 coats</b> Dulux Gloss Finish (28- Line)
Re-Painted Surface	<b>Primer - 1 coat</b> Not Required <b>Finish - 2 coats</b> Dulux Gloss Finish (28- Line)

### PRECAUTIONARY STATEMENTS

- Keep out of reach of children.
- If medical advice is needed, have product container or label at hand.
- Wear protective gloves. Wear eye or face protection.
- Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.
- IF INHALED: Remove person to fresh air and keep comfortable for breathing.
- IF IN EYES: Immediately call a POISON CENTER or doctor.
- Call a POISON CENTER or doctor/physician if you feel unwell.
- Keep cool
- Dispose of contents and container in accordance with all local, regional, national or international regulations.

For further details, carefully read the information on containers as well.

#### CONTACT US:

##### Registered Office:

##### Akzo Nobel India Limited

Geetanjali Apartment, 1st Floor, 8B Middleton Street, Kolkata 700 071

In case of any complaints please contact Customer care cell

Ph : 1800 3000 4455, or write to Customer Care Manager

Email : [customercare.india@akzonobel.com](mailto:customercare.india@akzonobel.com)

**Akzo Nobel India Limited**, Building No. 5, Tower A , 20th Floor

DLF Cyber City, Phase III, Gurgaon, India, Ph: 0124 - 4528400

Note: The information provided above may change without prior notice.

### APPLICATION TOOLS

Suitable for application by brush, roller & Spray



### DRYING TIME



Single coat at standard thickness  
**TOUCH DRY: Upto 60 Mins.**  
**TACK FREE: Within 4-6 hours**

### CLEANING UP

Clean all equipment with Duwel Thinner (61-33) or White Spirit / Mineral Turpentine Oil immediately after use.

### HEALTH SAFETY AND ENVIRONMENTAL INFORMATION

#### DANGER

- Treatments such as sanding, burning off etc. of paint films may generate hazardous dust and/or fumes. Wet sanding/ flatting should be used wherever possible. Work in well ventilated areas. Use suitable personal protection equipment.
- Keep away from sources of ignition – no smoking
- Do not breathe gas / fumes /vapour / spray
- Use only in well ventilated areas
- Keep out of the reach of children
- If swallowed seek medical advice immediately and show this container or label
- Do not empty into drains
- Avoid contact with skin or eyes. After contact with skin wash immediately with soap and water or a proprietary skin cleanser. Do not use solvent thinners or white spirits. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice
- Remove as much paint as possible from brushes and rollers before cleaning
- Safety data sheet available for professional users on request
- No added Lead, Mercury & chromium compounds.
- Lead content in dried paint film does not exceed 90 parts per million
- Lift with care – gross weight may exceed 10 kg.

### DANGER

- Flammable liquid and vapour
- Harmful if swallowed
- Causes serious eye damage
- Causes skin irritation
- May cause allergy or asthma symptoms or breathing difficulties if inhaled
- May cause an allergic skin reaction
- Toxic to aquatic life with long lasting effects.



Let's create together a brighter future for our planet.

Find out how at [www.dulux.in](http://www.dulux.in)