

HEALTH, SAFETY AND ENVIRONMENTAL INFORMATION:

- No added Lead, Mercury & chromium compounds
- Lead content in dried paint film does not exceed 90 parts per million
- Treatments such as sanding, burning off etc. of paint films may generate hazardous dust and other fumes. Wet sanding/flaming should be used wherever possible. Work in well ventilated areas. Use suitable personal protection equipment
- Do not get in eyes, on skin or on clothing
- Call a POISON CENTER or physician if you feel unwell
- Do not breathe vapour/spray
- Remove as much paint as possible from brushes and rollers before cleaning
- Keep away from food drinks and animal feed
- Store in a cool and shaded place
- Container must be in a secure, upright position and be tightly closed
- In case of contact with eyes, rinse immediately with plenty of water and seek medical advice
- In case of contact with skin wash immediately with soap and water or a proprietary skin cleanser. Do not use solvents or thinners.
- Do not empty into drains or water course
- Safety data sheet available for professional/user on request
- Do not use empty container for storing food
- Use only in well ventilated areas

Warning

HAZARD STATEMENTS:



- May cause an allergic skin reaction.
- Very toxic to a aquatic life with long lasting effects.


PRECAUTIONARY STATEMENTS:

- Keep out of reach of children.
- If medical advice is needed, have product container or label at hand.
- Wear protective gloves
- Avoid release to the environment
- Avoid breathing vapour
- Collect spillage
- Take off contaminated clothing and wash it before resuse
- IF ON SKIN: Wash with plenty of water
- If skin irritation or rash occurs : Get medical advice or attention
- Dispose of contents and containers in accordance with all local, regional, national and international regulations.

CONTACT US:

Registered office,
Akzo Nobel India Limited Geetanjali Apartment, 1st floor, 8B Middleton Street, Kolkata 700 071
In case of any complaints please contact Customer care cell,
Akzo Nobel India Ltd., 9th Floor, Magnum Towers, Golf Course Ext Rd, Sector 58, Gurugram, 122011,
Haryana, India

Note: The information provided above may change without prior notice.

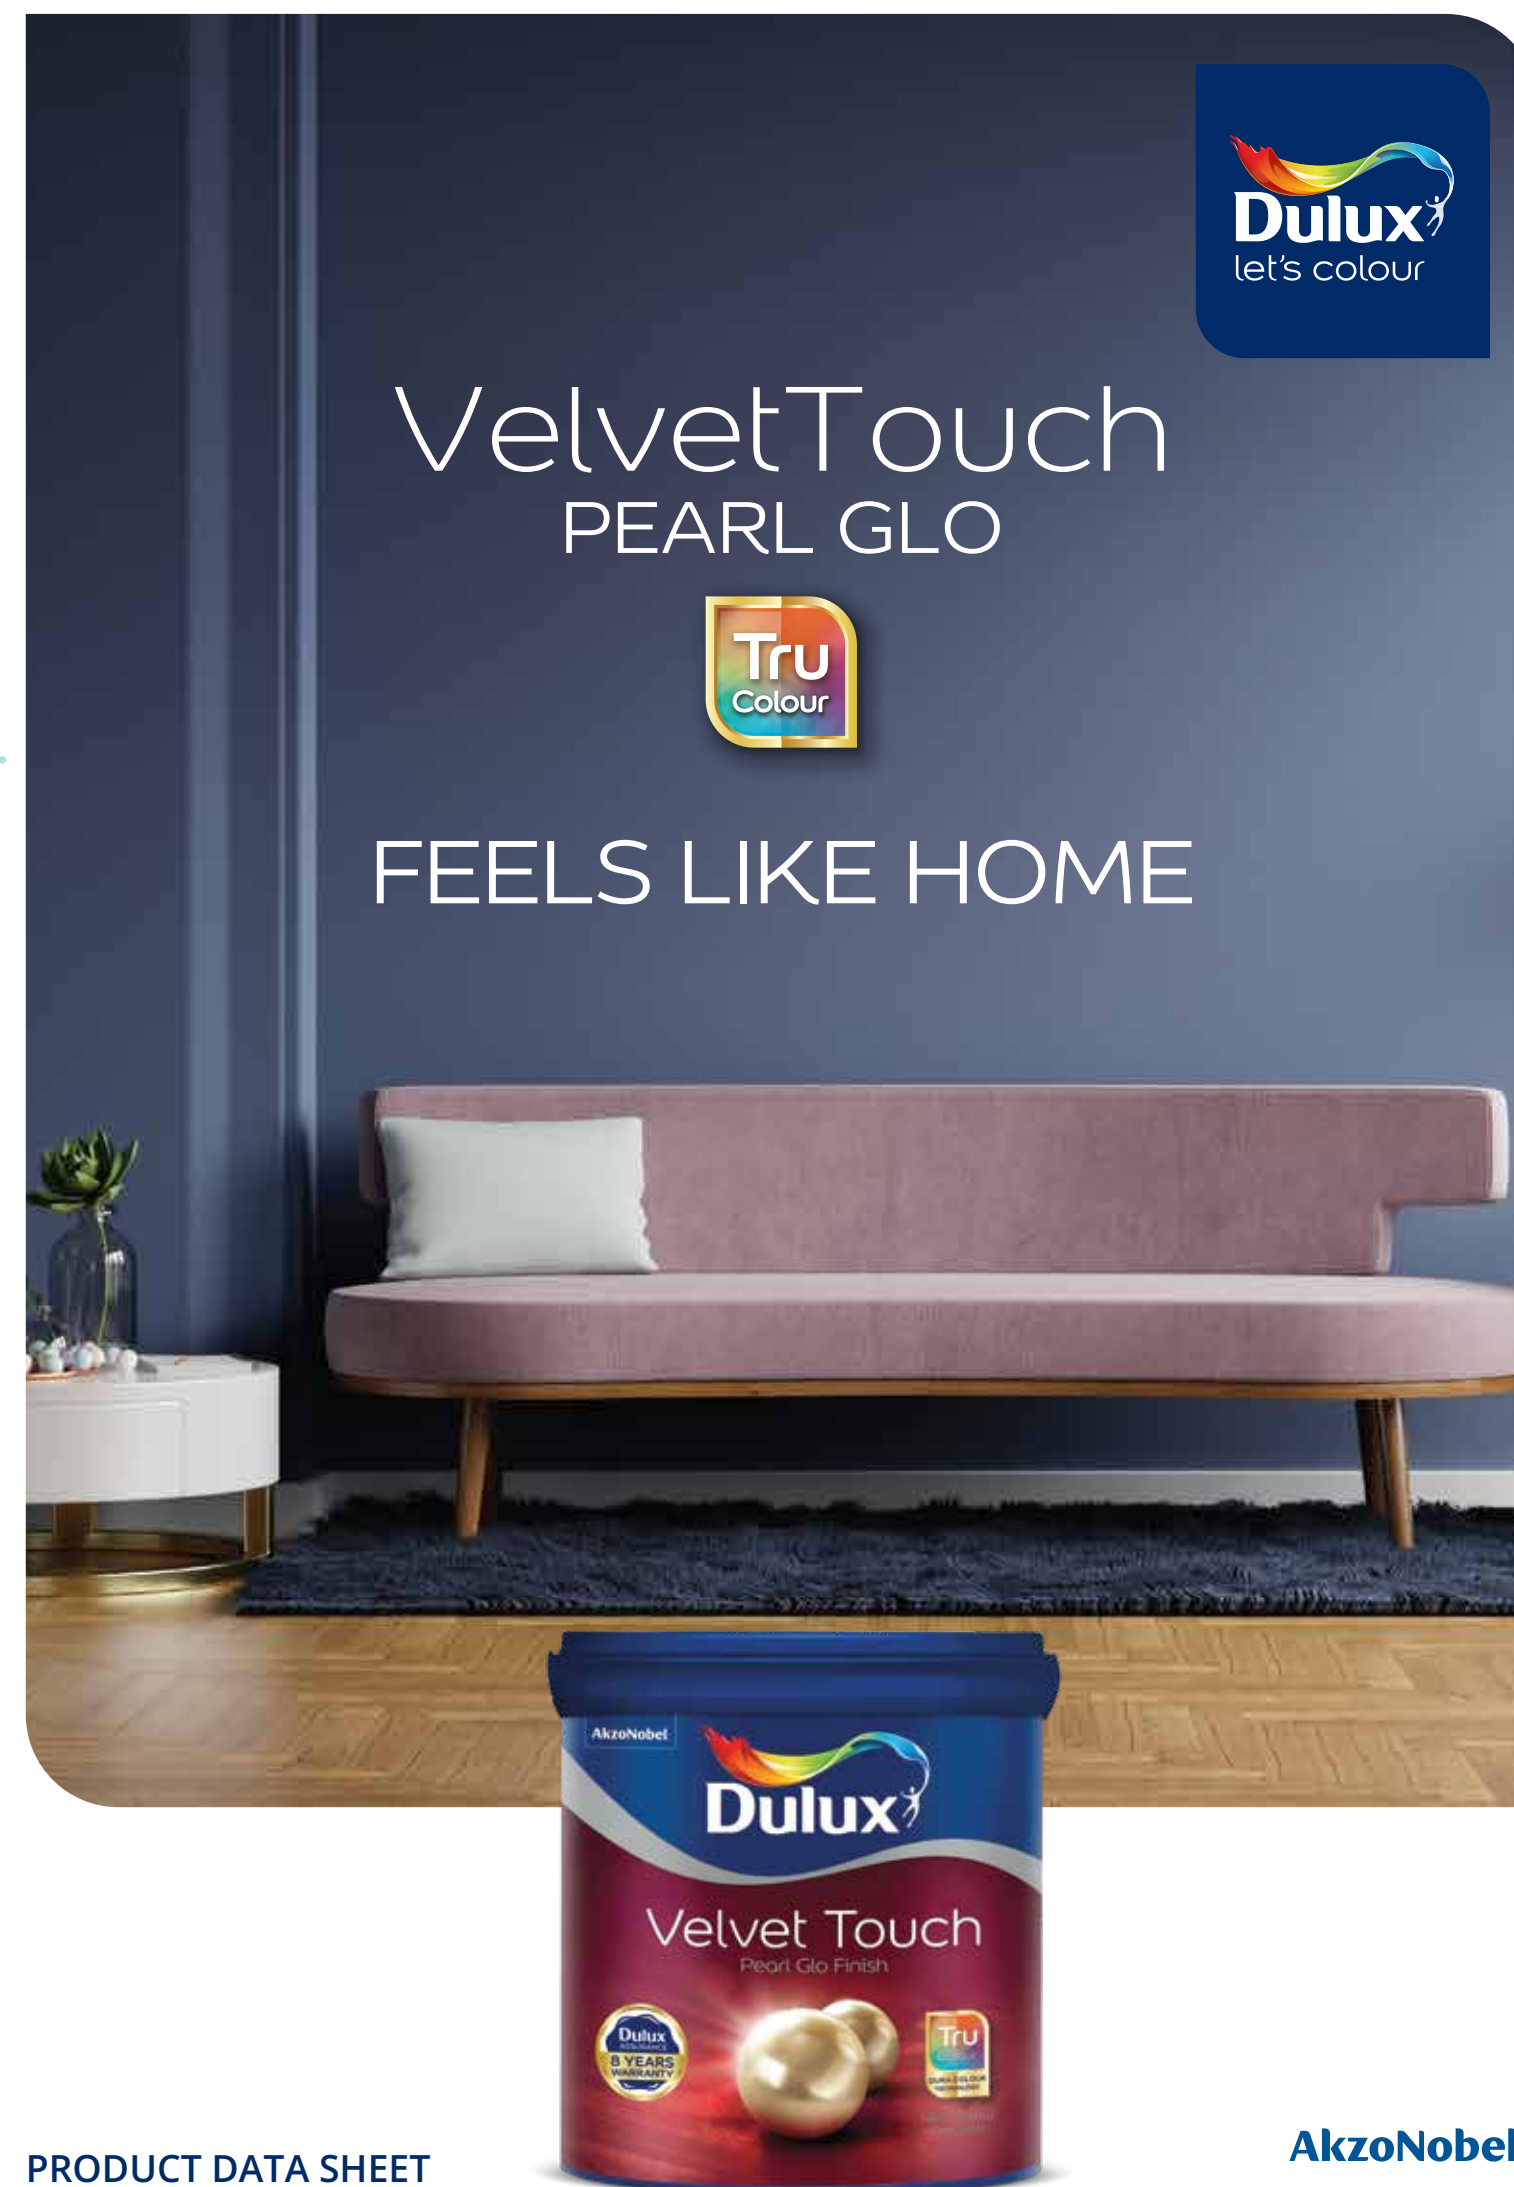

Dulux
let's colour

VelvetTouch

PEARL GLO

Tru
Colour

FEELS LIKE HOME

Dulux
Velvet Touch
Pearl Glo Finish

AkzoNobel

PRODUCT DESCRIPTION :

Dulux Velvet Touch Pearl Glo is a super-premium interior emulsion which gives soft-sheen luxury finish on walls. It is a highly durable and washable emulsion. It is the only interior emulsion that brings alive the smooth touch of Velvet and soft glo of Pearls on the walls.



PRODUCT FEATURES AND BENEFITS :



Give your interior walls the ultra luxurious look with Velvet Touch Pearl Glo.
Made with finest ingredients and colour pigments, Velvet Touch Pearl Glo delivers intense rich colours with an ultra smooth finish.



Core and Shell Technology:
Equipped with a unique core & shell technology, it lends elegance & class on the walls. Being the only Luxury emulsion enriched with the essence of Pearl, Velvet Touch gives walls a unique and long-lasting Pearl Glow Finish



Best-in-class Smoothness:
The enhanced flow-ability makes the application process extremely easy & lends it best-in-class smoothness



Finger marking protection:
Protection from finger marking



Scrub Resistance:
Specially formulated to provide a long lasting colour and finish with best-in-class scrub resistance, opacity and wash-ability



Anti-Bacterial & Anti-Fungal
Protects from bacteria, fungus and molds

PRODUCT RELATED INFORMATION :

Film Composition:

Pigment	: Non-lead pigment
Binder	: Acrylic copolymer emulsion
Solvent	: Water
Bases	: Br.White + 6 Bases (White Base (90), Intermediate (92), Accent (94), Deep (95), Yellow (96) , Red (97))
Gloss/ Sheen Level	: Mid Sheen pearl glow finish
Flash Point (IS 101/1987, Part 1, sec 6)	: Non-Flash
Stability of Thinned Paint	: Can be used within 24 hours of thinning after mixing
Dry Film Thickness (Calculated)	: 20-25 microns at a coverage of 160-180 sq ft/ litre
Coverage	: The Spreading capacity/coverage of this product will vary considerably according to the surface preparation, roughness and porosity of the surface and change in color on the wall <ul style="list-style-type: none">• On smooth surface of low porosity: Range 140-160 sqft/litre/2 coats• On high porous absorbent surface: Range 120-140 sqft/litre/2 coats
Pack Size Available	: 1, 4, 10 & 20 litres

APPLICATION RELATED INFORMATION:

PREPARE

Application Tool:
Suitable for application by brush or Roller.

Surface Preparation:
• Ensure that the surface is clean, dry and free from all lose particles, paint film, dirt, dust, mould, fungal growth etc. before application. Surface should be thoroughly rubbed down using suitable abrasive paper and thereafter wiped off. For new concrete or plaster surface should be allowed to mature properly. Use suitable Dulux Aquatech range of products to fix the dampness issue in wall. Proper surface preparation is must to get the desired effect and finish.

PAINT

Priming:
• Prime surface with a coat of Water Based Cement Primer or Solvent Based Cement Primer. Allow drying 4-6 hrs.

Putty:
• Smoothen the surface by filling dents with thin coat of Dulux Acrylic Wall Putty. Allow drying for 3-4 hrs. Sand with emery paper 180 and wipe clean.

Priming:
• Apply another coat of primer & allow drying for 4 hrs. Primer-Putty-Primer is must to get the desired effect to topcoat.

Dilution:
• Use 35-40% of clean water for Br. White and pastel shades. For dark shades use 30% of clean water. Do not over dilute and shake the paint well before use.

Finishing:
• Stir thoroughly before use. Apply 2-3 coats of Dulux Velvet Touch Pearl Glo with minimum 4 hrs gap between the coats. Normally two coats of paint are sufficient for opacity and the desired finish. However, an extra coat may be required for change of colour and deep base shades.

CLEAN

Cleaning:
Clean all equipment with clean water immediately after use. Refer to Dulux Product Data Sheet for further details.

Drying Time:
• Touch Dry : Upto 1 hour.
• Recoat : 5-6 hours (Single coat at standard thickness)

POST APPLICATION INSTRUCTIONS :

For best performance of the paint, ensure proper washing and cleaning at regular intervals of six months.