

HEALTH, SAFETY AND ENVIRONMENTAL INFORMATION

- No added Lead, Mercury & chromium compounds.
- Flammable material. Store container in upright position, with lid tightly closed, in a cool, dry place, away from ignition sources. In case of fire, use foam, dry powder, CO₂, never use water.
Keep out of reach of children and away from combustible material, food, drink and animal feeding stuffs.
- Avoid contact with skin. Remove splashes from skin with soap and water or recognized skin cleanser. If swallowed, seek medical advice immediately and show the container or label.
- Use only in well ventilated areas. Vapours may cause drowsiness and dizziness.
- Repeated exposure may cause skin dryness or cracking.
- Contains Cobalt carboxylate, Ehtyl Methyl Ketoxime. May produce an allergic reaction.
- Avoid release to the environment.
- Refer to special instructions/Safety data sheet.
- Do not empty material into drains or in water courses.
- Highly toxic to aquatic organisms, may cause long term adverse effects in the aquatic environment.
- Contains spillage using sand or earth.
- Safety Data Sheet available for professional user on request.

PRECAUTIONS

- Stir thoroughly before use
- Avoid extreme temperature
- Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hrs of application.
- Do not apply during wet weather.
- Wear Eye protection when applying
- Do not use Universal stainers or any other colorants.
- Do not over thin or overextend the brush.
- Avoid inhalation of dust wearing a suitable nose pad during sanding or surface preparation
- In case of contact with eyes, rinse immediately with plenty of water and seek medical advice
- In case of contact with skin, remove splashes from skin with soap and water or a recognized skin cleaner
- In case of ingestion seek medical attention


CONTACT US:

Registered office,
Akzo Nobel India Limited Geetanjali Apartment, 1st floor, 8B Middleton Street, Kolkata 700 071
In case of any complaints please contact Customer care cell,
Akzo Nobel India Ltd., 9th Floor, Magnum Towers, Golf Course Ext Rd, Sector 58, Gurugram, 122011,
Haryana, India

Note: The information provided above may change without prior notice.



Introducing the all new ZINC YELLOW METAL PRIMER

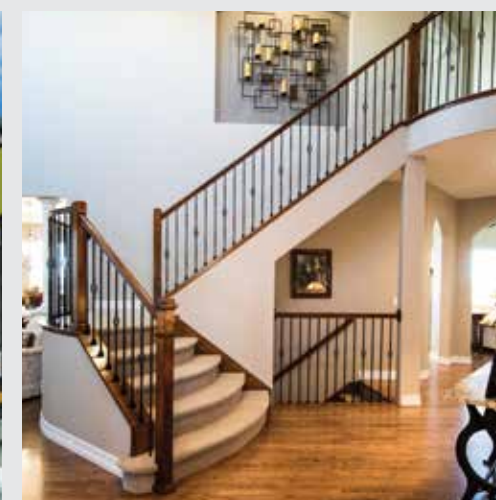

Keeps your metal surfaces LONG LASTING & BEAUTIFUL



ZINC YELLOW METAL PRIMER

Dulux Zinc Yellow Metal Primer is a solvent based protective primer suitable for interior and exterior ferrous and surface treated non-ferrous metal work. It gives effective protection against Corrosion to the surface and has strong adhesion properties. Appropriate application of the primer ensures better protection to the metal surface as well as higher durability of finish coat.

PRODUCT FEATURES AND BENEFITS



Tough & Hard Film



Excellent resistance to rust and saline weather



Better TopCoat Coverage

PRODUCT RELATED DATA




FILM COMPOSITION

PIGMENT	Light fast Non-Lead/Chrome pigment
BINDER	Synthetic Alkyd
SOLVENT	White spirit with other non-toxic solvents
COLOUR	Yellow

VOC LEVEL
VOC (Theoretical) ASTM D 3960 – 300-350 gm/L

GLOSS/SHEEN LEVEL
Matt Finish

STABILITY OF THINNED PAINT
Use within 24 hours of thinning after mixing

DRY FILM THICKNESS
28-34 microns at coverage of 90-110 sqft/L/2 coats  Two coats application recommended for desired performance.

PACK SIZES
0.5 ,1, 4, 10 & 20 litres

FLASH POINT (IS 101/1987, Part 1, Sec 6)
Less than 35 degree

SHELF LIFE
<ul style="list-style-type: none">• 3 years from the Date of Manufacturing in the original sealed condition.• Store under cover, away from direct sunlight and protect from extreme temperature.• In hot temperature conditions, it must be stored in a temperature-controlled environment i.e. less than 30 Deg c.

APPLICATION RELATED DATA

Before application, read the safety, health and environmental information and the precautions given below.

SURFACE PREPARATION



Ensure surface is thoroughly clean, dry and free from all loose dirt, chalk, grease, fungi, algae and flaking paint. This can be achieved by sanding the surface by using Emery paper No. 180 & wipe clean.

DILUTION



Brush & Roller : For best result thinning is not recommended



Spray : Add upto 10% Dulux Thinner/White spirit/Mineral Turpentine Oil (MTO) in 1 liter Dulux Zinc Yellow Primer

FINISHING COAT



For best protection Apply 2 coats of Dulux 5in 1 Gloss, Dulux Premium Gloss, Dulux Satin, Dulux Satin Stay bright

DRYING TIME



- Single coat at standard thickness:
- Touch Dry: With in 60 mins
 - Tack Free: With in 4-6 hour
 - Recoat: 8 hours