




## SPRAY PAINT

Dulux Simply Refresh Spray Paint is a solvent-based aerosol which is suitable for decoration of pre-painted wood/metal objects or walls.




SUPERIOR GLOSS



WOOD, METAL  
& WALLS



WATER  
RESISTANT



LOW ODOUR



### Application Tool

Spray can with inbuilt nozzle

### Pack Sizes

200ml, 400ml





### Surface Preparation



- Ensure surface is thoroughly clean, dry and free from all loose dirt, rust, grease or oily material, laitance, organic debris, fungi, algae and flaking paint. This can be achieved by using the sandpaper provided in the Dulux Simply Refresh painting kit for uniform and smooth surface. Any traces of oil or grease should be removed with solvent wiping.



- For repainting surfaces sand away the old paint or varnish layers that don't adhere completely before application of Dulux Simply Refresh Spray paint.

- Any cracks or crevices present on wood or masonry surface should be filled with suitable filling compounds before application.

### Shake the Aerosol can well for 1-2 mins before use




### Application


- Hold the aerosol can vertically and apply in thin even layers at 25 to 30 cm distance from the object.

- Apply 2-3 coats of Dulux Simply Refresh spray paint in a stroking motion. Leave at least 10 mins between the successive coats. Apply layers crosswise to each other.


- Clean the spray nozzle and spray button after using for any clogging by rinsing with thinner.

<p><b>Drying Time*</b></p>  <p>Touch Dry : 3-10 Mins. Recoat : 30 mins. Hard dry : 24 hrs.</p>	<p><b>Stability of paste</b></p> <p>Use within 24 hrs. of taking out from the tube</p>	<p><b>VOC Level</b></p> <p>300 - 350 gm/lit</p>
<p><b>Coverage</b></p> <p>12-15 Sqft for 400 ml Can</p>	<p><b>Flash Point</b></p> <p>&lt; 0 Deg</p>	<p><b>Shelf Life</b></p> <p>24 months Store away from direct sunlight.</p>

\*Drying time may vary according to temperature and humidity.

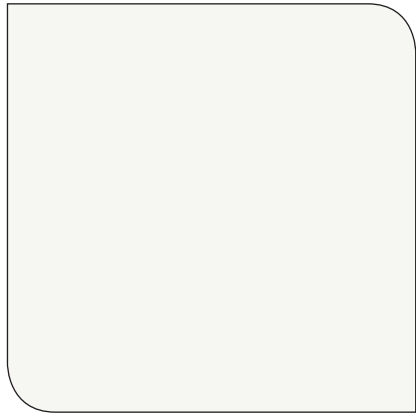

White  
XYZ



Black  
XYZ



Phiroza  
XYZ



Golden Yellow  
XYZ



Signal Red  
XYZ



Deep Orange  
XYZ




Golden Brown  
XYZ




Dark Brown  
XYZ



Gold  
XYZ



Silver  
XYZ



Bus Green  
XYZ

## HEALTH, SAFETY & ENVIRONMENTAL SECURITY :



- **No added Lead, Mercury & chromium compounds.**
- **Lead content in dried paint film does not exceed 90 parts per million.**
- Treatments such as sanding, burning off etc. of paint films may generate hazardous dust and other fumes. Wet sanding/flaming should be used wherever possible.
- Work in well ventilated areas. Use suitable personal protection equipment.
- Wear eye/hand protection.
- Do not breathe vapour/spray.
- Remove as much paint as possible from brushes and rollers before cleaning.
- Do not get in eyes, on skin or on clothing.
- Do not empty into drains or water course.
- Call a POISON CENTER or physician if you feel unwell.
- Keep away from food drinks and animal feed.

## WARNING

### HAZARD STATEMENTS



- Extremely flammable aerosol. Pressurised container may burst if heated.
- Causes skin irritation
- Causes serious eye irritation.
- May cause drowsiness or dizziness.
- May cause damage to organs through prolonged or repeated exposure.

### PRECAUTIONARY STATEMENTS

- Keep out of reach of children.
- If medical advice is needed, have product container or label at hand.
- Avoid release to the environment.
- Avoid breathing vapour.
- Collect spillage.
- Get medical advice/attention if you feel unwell.
- Dispose of contents and containers in accordance with all local, regional, national and international regulations.
- Flammable. Keep away from any sources of ignition.
- Store in a well-ventilated place, protected from frost and direct sunlight.
- Do not expose to temperatures above 45°C. Close packaging tightly.
- Empty packaging and (paint) residues are to be disposed of as chemical waste.
- Don't spray on open flame or other ignition source.
- Pressurized containers do not Puncture.